



fatraclick®



Collection
2020-2022

FLOATING VINYL FLOOR

www.fatrafloor.com

FatraClick



The floor
you would frame.



1235 mm

230 mm


305 mm

915 mm





Floating vinyl floors FatraClick

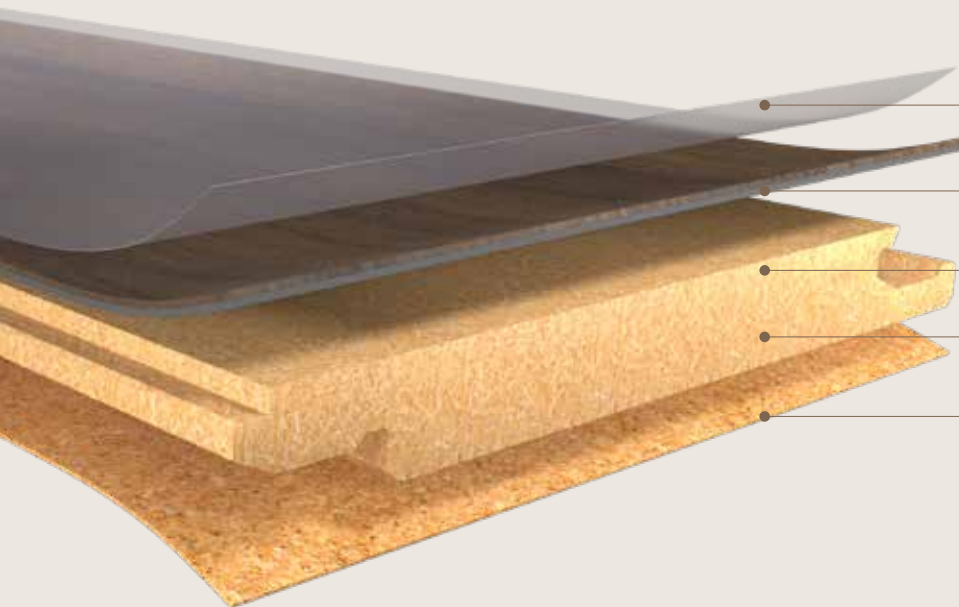

- 1 PUR protective layer
- 2 Vinyl layer with decorative foil
- 3 HDF layer with increased resistance to moisture
- 4 Uniclic® system for easy and quick installation
- 5 Cork layer ensuring sound insulation

Surface structure

Shale




Coarse wood



The FatraClick vinyl floating floor brings together innovations in flooring construction, the extensive experience of the specialists at Fatra and modern trends in interior design.

- perfect nature-imitating design
- quick and easy glueless laying
- excellent acoustic insulation
- surface resistant to bacteria
- possible laying on underfloor heating
- proprietary Uniclic® locking system
- resistant to daily used chemicals
- 10-year warranty

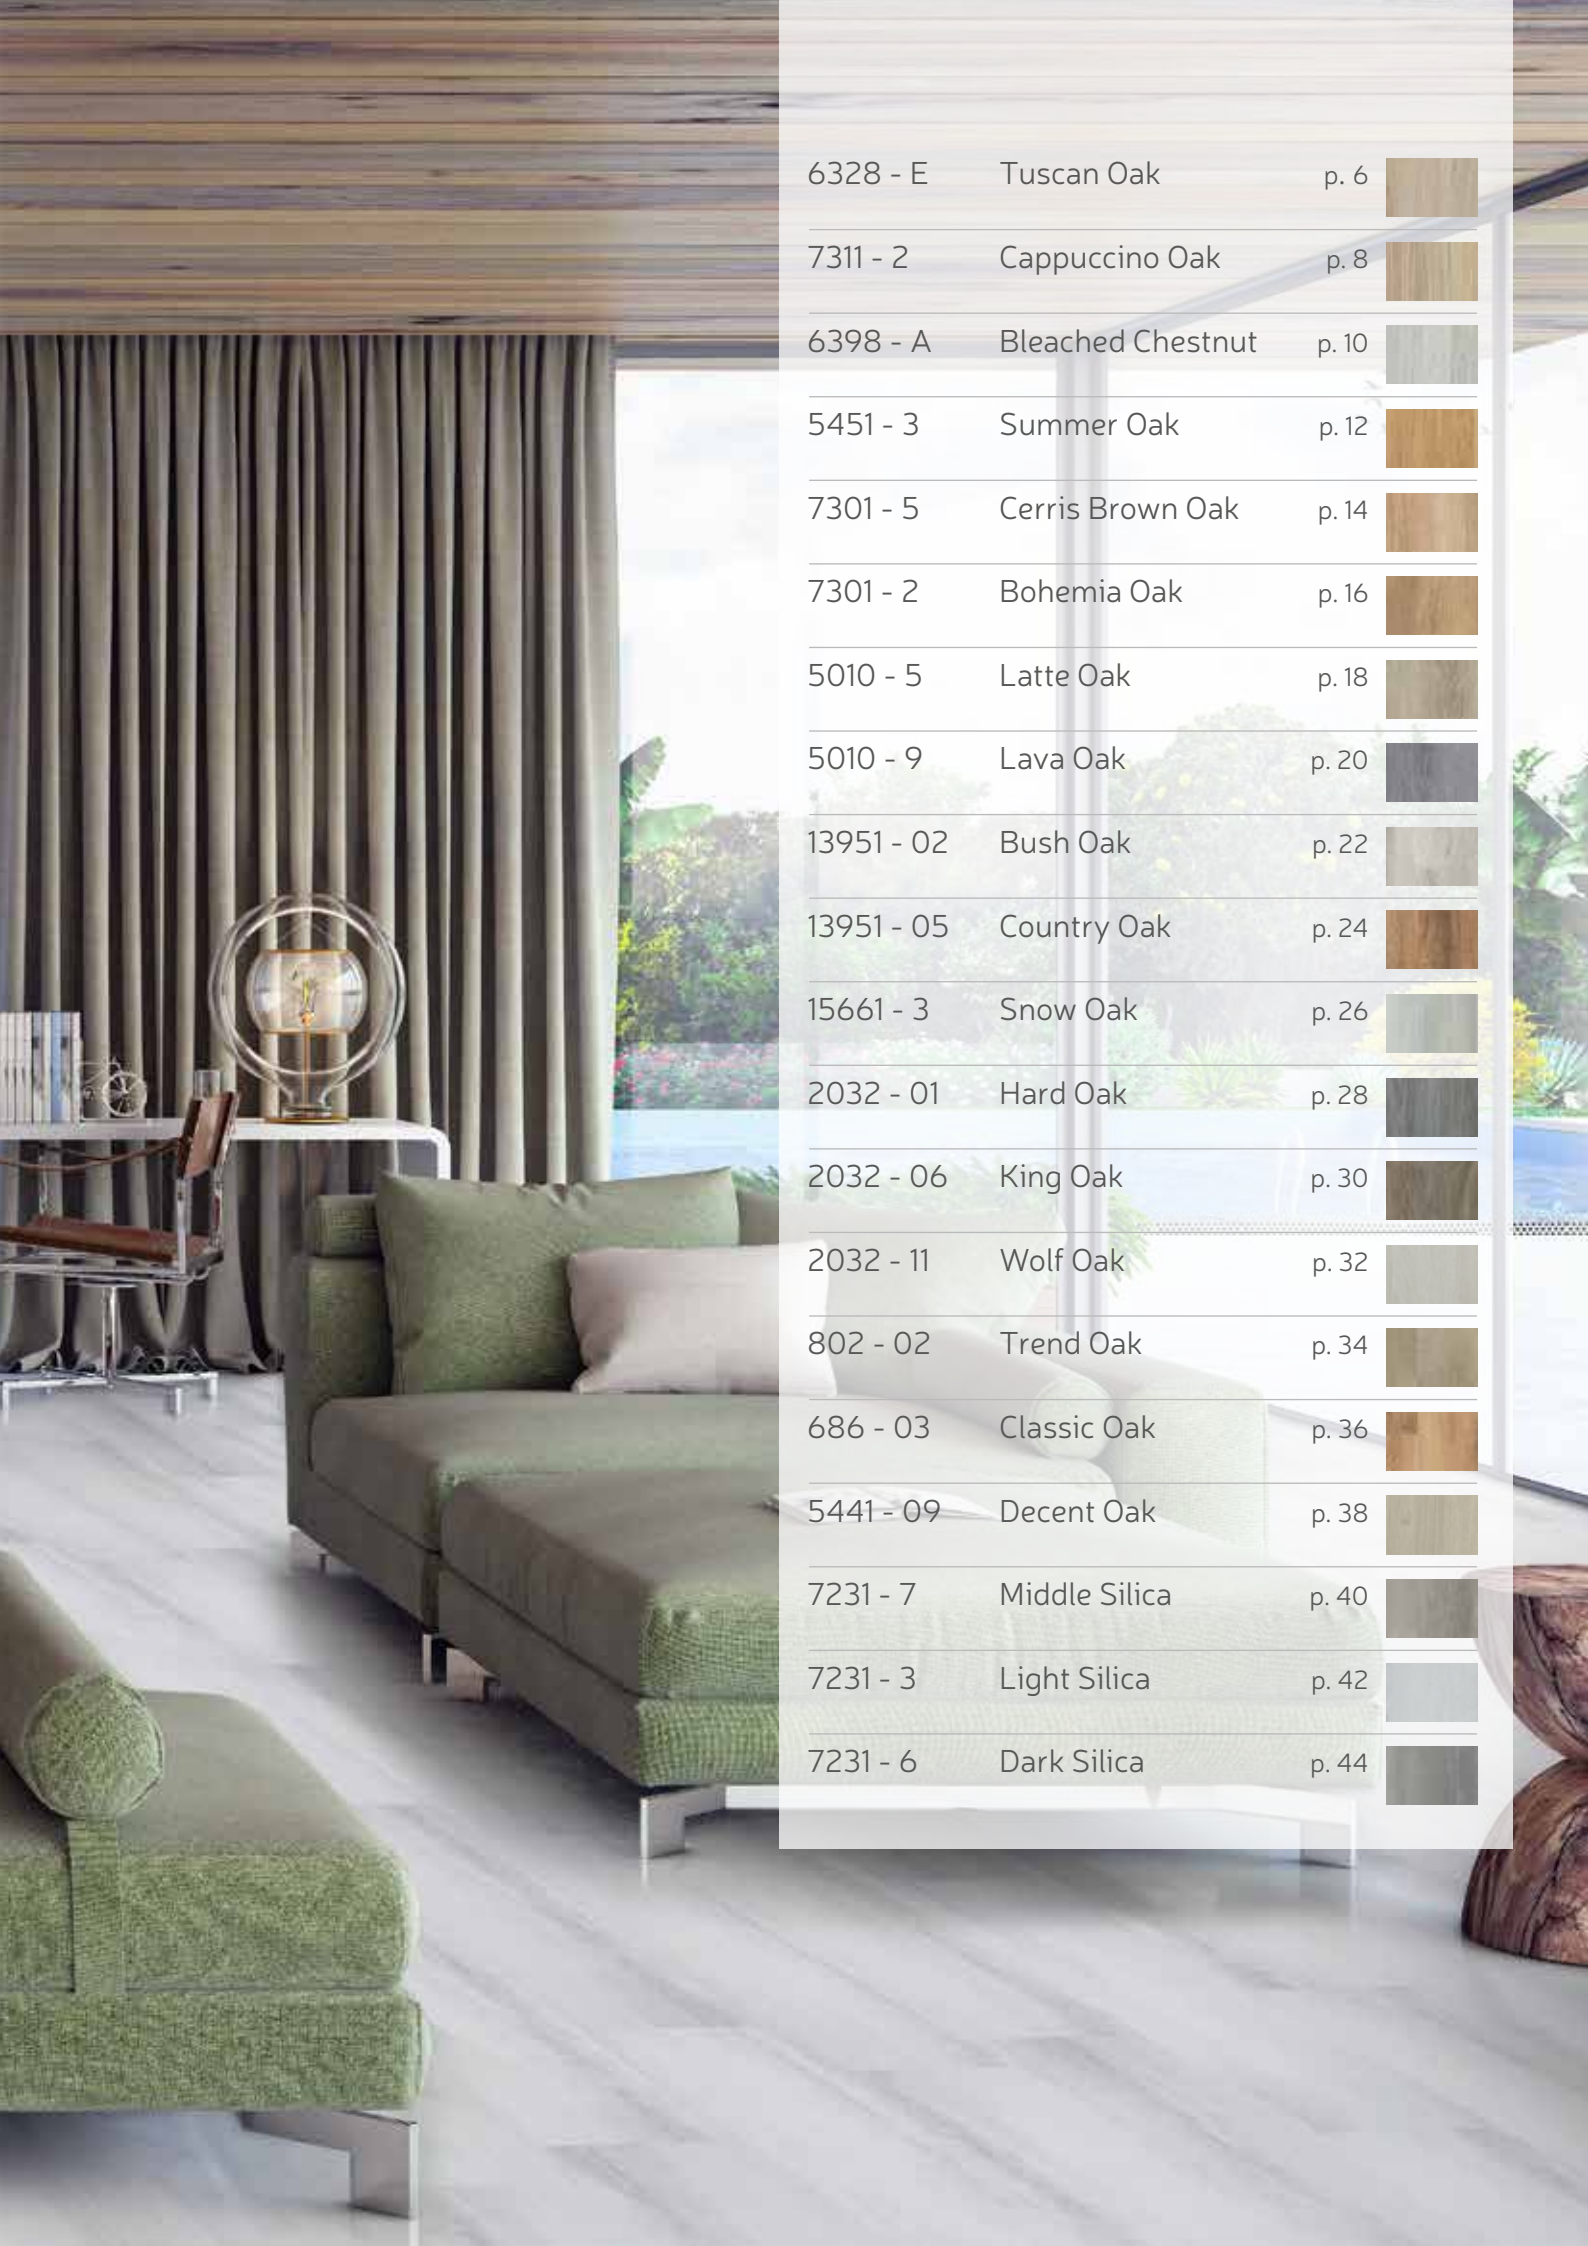

6328 - E	Tuscan Oak	p. 6	
7311 - 2	Cappuccino Oak	p. 8	
6398 - A	Bleached Chestnut	p. 10	
5451 - 3	Summer Oak	p. 12	
7301 - 5	Cerris Brown Oak	p. 14	
7301 - 2	Bohemia Oak	p. 16	
5010 - 5	Latte Oak	p. 18	
5010 - 9	Lava Oak	p. 20	
13951 - 02	Bush Oak	p. 22	
13951 - 05	Country Oak	p. 24	
15661 - 3	Snow Oak	p. 26	
2032 - 01	Hard Oak	p. 28	
2032 - 06	King Oak	p. 30	
2032 - 11	Wolf Oak	p. 32	
802 - 02	Trend Oak	p. 34	
686 - 03	Classic Oak	p. 36	
5441 - 09	Decent Oak	p. 38	
7231 - 7	Middle Silica	p. 40	
7231 - 3	Light Silica	p. 42	
7231 - 6	Dark Silica	p. 44	

Tuscan Oak

6328 - E





Cappuccino Oak

7311 - 2





Bleached Chestnut

6398 - A





Summer Oak

5451 - 3





Cerris Brown Oak

7301 - 5





Bohemia Oak

7301 - 2





Latte Oak

5010 - 5





Lava Oak

5010 - 9





Bush Oak

13951 - 02





Country Oak

13951 - 05





Snow Oak

15661 - 3





Hard Oak

2032 - 01





King Oak

2032 - 06





Wolf Oak

2032 - 11





Trend Oak

802 - 02





Classic Oak

686 - 03





Decent Oak

5441 - 09





Middle Silica

7231 - 7





Light Silica

7231 - 3





Dark Silica







7231 - 6





Flooring Installation

Floating vinyl floor FatraClick features the Uniclic® locking system and is installed without use of adhesive. You can walk on the floating floor during and immediately after installation is finished. Install FatraClick planks on PE membrane that serves as vapor control barrier and slippery underlay. More information about methods of installation you can find in the Installation manual PN 5424/2010 or in the instructional video on www.fatrafloor.com.

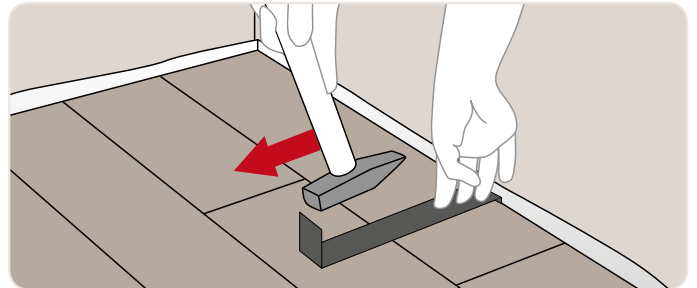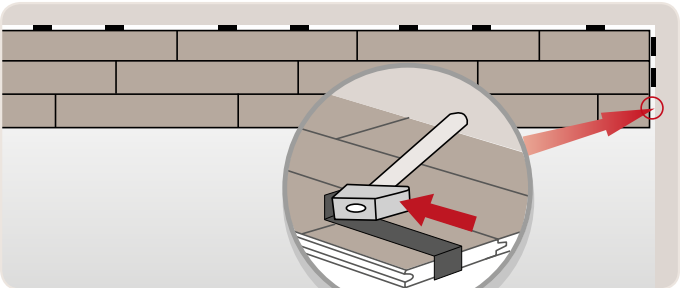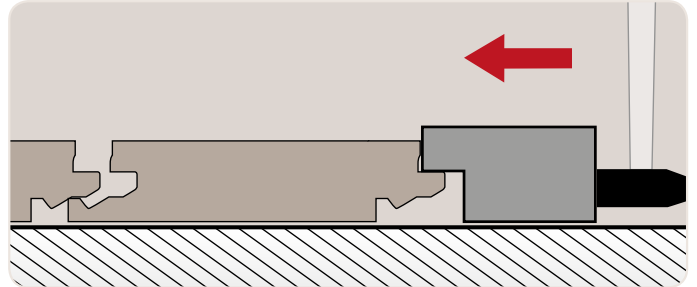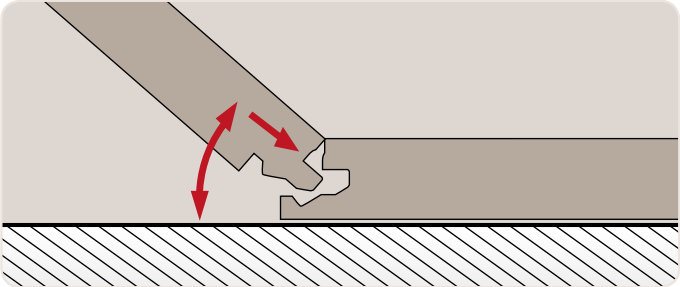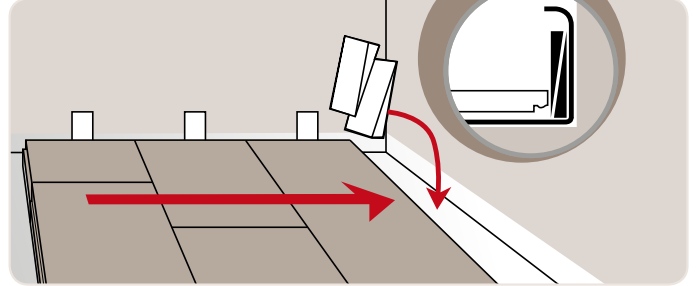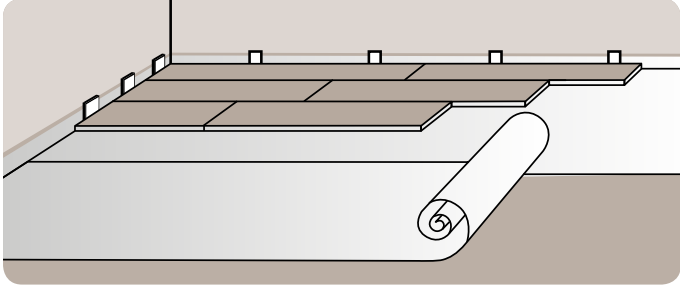


Notes

Technical parameters

Vinyl floating floor FatraClick®

	Norm	Unit	Value
Areas of application	EN ISO 10582 EN ISO 10874		21-23 31-33
Total thickness	EN ISO 24346	mm	9,5
Wear layer thickness	EN ISO 24340	mm	0,40
Surface treatment	-		PUR
Plank size	EN ISO 24342	mm	1235 x 230 915 x 305
Total weight	EN ISO 23997	g/m ²	9300
Dimensional stability	EN ISO 23999	%	≤ 0,15
Residual indentation	EN ISO 24343-1	mm	≤ 0,10
Colour fastness to artificial light	EN ISO 105 - B02 (metoda 3)	-	min. 6
Reaction to fire	EN 13501 - 1	-	B _{F1-S1}
Chemical resistance and resistance to staining	EN ISO 26987	-	meets
Resistance to bacteria	EN ISO 846 method C	-	yes
Anti-slipping	EN 14041 DIN 51130	-	DS R11
Impact sound reduction	EN ISO 717-2	dB	16
Thermal resistance	EN 14041	m ² K/W	0,088
Floor heating	-	-	yes
Castor chair resistance	ISO 4918	-	type W
VOC	-	-	meets
Formaldehyde emission	EN 14041	-	E1

	Dimension (mm)	Number of pieces in box	Volume in cardboard box (m ³)	Pallet m ²	Nr. of cardboard boxes/pallets	Kg/box
Packing	1235 x 230	6	1,704	102,24	60	cca. 16 kg
	915 x 305	6	1,674	100,44	60	cca. 16 kg



fatra

fatraclick[®]

Fatra, a.s.

třída Tomáše Bati 1541
763 61 Napajedla
Czech Republic

Tel.: +420 577 501 111
www.fatrafloor.com



Distributor:

www.fatrafloor.com

